


WASHING MACHINE MWB 45Z

Dimensions scheme



PELLERIN MILNOR CORPORATION

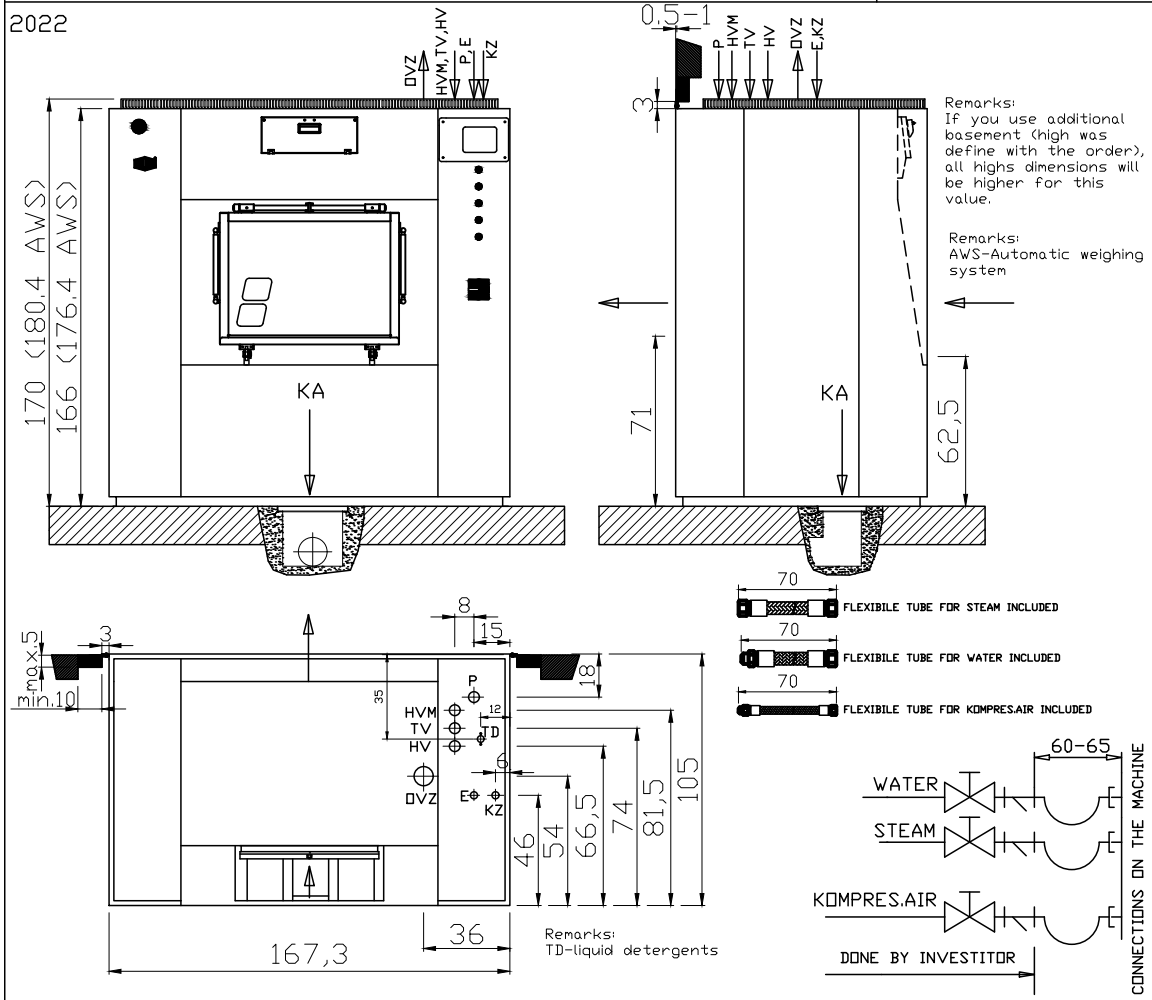

Dimensions in cm
 All rights for changes are reserved
 El.connections over GS switch. Leave the lenght of el.cable longer than 2 m.

TEHN. CHARASTERISTICS	Type of the machine	Units	MWB 45Z (steam heating)	MWB 45Z (steam heating)	MWB 45Z (electric heating)	MWB 45Z (combined heating)
CAPACITY		kg/fill.	45			
DIMENSIONS		mm	1673 x 1050 x 1700 (1804 AWS)			
WEIGHT		kg	1320			
G-faktor			361			
CONNECTIONS:						
	cold water -HV		20 (3/4)			
	warm water 75°C-TV		20 (3/4)			
	cold water-soft -HVM		20 (3/4)			
	steam (direct) -P		15 (1/2)	25 (1)	---	Pv or Pn
	kompresed air -KZ		10 (3/8)			
	air exhaust -DVZ		76			
	liquid dosing -TD		15 (1/2)			
CANALISATION	-KA	mm	125			
EL.CONNECTION POWER		kW	6		42	
PROTECTION (400V/3NAC/50Hz)		A	25		80	
EL.CONNECTION CABLE -E		mm ² Cu	5x4		5x16	
PROTECTION (208V/3AC/50/60Hz)		A	25		125	
EL.CONNECTION CABLE -E		mm ² Cu	4x4		4x35	
PROTECTION (220V/3AC/50/60Hz)		A	25		125	
EL.CONNECTION CABLE -E		mm ² Cu	4x4		4x35	
PROTECTION (240V/3AC/50/60Hz)		A	25		125	
EL.CONNECTION CABLE -E		mm ² Cu	4x4		4x35	
PROTECTION (480V/3AC/50/60Hz)		A	25		63	
EL.CONNECTION CABLE -E		mm ² Cu	4x4		4x10	
PROTECTION (600V/3AC/50/60Hz)		A	16		50	
EL.CONNECTION CABLE -E		mm ² Cu	4x2,5		4x6	
CONNECT.HEAT.POWER:						
	steam	kW	90		---	
	electric	kW			36	
	kompresed air	l/s	0,2			
	water	l/s	2			
PRESSURE ON INLETS:						
	water		2 - 6			
	kompresed air	bar	6 - 10			
	high(Pv)/low(Pn) press.steam		3-8 (Pv)	0,3-0,5 (Pn)	---	Pv or Pn