

M76ED

75-lb Capacity OPL Dryer

Standard Features:

- 75-lb. Capacity
- Single Phase Reversing
- Residual Moisture Control (RMC)
- Self-Diagnostic Microprocessor Control
- 100% Axial Airflow
- Completely Sealed Basket
- Non-Perforated Ribs and Basket
- Dual-Paned Door Glass
- Four-Point Roller Support System
- High Capacity Lint Drawer

Optional Features:

- Stainless Steel Front, Cabinet & Basket
- S.A.F.E. (Sensor Activated Fire Extinguishing System)

OPL



M76ED OPL Dryer

Why Purchase Milnor EcoDry?

100% Axial Airflow (standard)

EcoDry tumblers incorporate a 100% axial airflow design with a completely sealed basket. This ensures the most efficient drying available on the market today without sacrificing dry times.

Four-Point Roller Support System (standard)

EcoDryers are designed with a four-point roller support system, eliminating costly repairs and downtime due to trunnion failures.

Single Phase Reversing (standard)

Single Phase Reversing is standard on the ES-76 and ES-50 (optional on other units). What once was an expensive option requiring an upgrade from single phase to three phase electrical service is now available in single phase. A reversing tumbler ensures that the load doesn't "rope" or "ball up", providing a quicker, more even drying process.

Residual Moisture Control (standard)

EcoDry utilizes a unique Residual Moisture Control (RMC) sensing system to measure the presence of moisture in the load. The patented system senses when the load is dry, shutting the unit down to prevent over-drying. This saves time, utility costs as well as prolongs the life of dried items.


Your local Milnor independent authorized distributor



M76ED

M76ED Specifications

Tumbler Capacity (dry weight)	75 lbs. (34.02 kg)	
Tumbler Diameter	37" (93.98 cm)	
Tumbler Depth	35-1/2" (90.17 cm)	
Tumbler Volume	22.09 cu ft (625.52 L)	
Tumbler/Drive Motor	3/4 hp (0.56 kW)	
Blower/Fan Motor	1/2 hp (0.37 kW)	
Door Opening (Diameter)	27-3/8" (69.53 cm)	
Door Sill Height	31-1/4" (79.375 cm)	
S.A.F.E. Water Connection	North America	3/4"-11.5 NH
	Outside North America	3/4" B.S.P.T.
Dryers per 20'/40' Container	9 / 20	
Dryers per 48'/53' Truck	25 / 27	
Width	38-1/4" (97.16 cm)	
Depth	49-13/16" (126.52 cm)	
Height	70-1/2" (179.07 cm)	
Airflow gas/electric/steam	60 Hz 50 Hz	600 cfm (17.00 cmm) 500 cfm (14.16 cmm)
Exhaust Connection	8" (20.32 cm)	
GAS MODEL:	Approx. Net Wt. 745 lbs (337.93 kg) Approx. Ship Wt. 775 lbs (351.53 kg) Heat Input 60 Hz 130,000 btu/hr (32,760 kcal/hr) 50Hz 110,000 btu/hr (27,720 kcal/hr) Inlet Pipe Connection 1/2" M.N.P.T. 1/2" F.B.S.P.T. (CE and Australia Only)	
ELECTRICAL MODEL:	Approx. Net Wt. 745 lbs (337.93 kg) Approx. Ship Wt. 775 lbs (351.53 kg) Exhaust Connection (Diameter) 8" (20.32 cm)	
Oven Size		
kW	Btu/hr	kcal/hr
18.0	61,473	15,491
18.5	63,105	15,902
20.3	69,418	17,493
22.0	75,084	18,921
STEAM MODEL:	Approx. Net Wt. 745 lbs (337.93 kg) Approx. Ship Wt. 775 lbs (351.53 kg) Steam Consumption 107 lb/hr (48.53 kg/hr) Operating Steam Pressure 150 psi max (10.34 bar) Exhaust Connection (Diameter) 8" (20.32 cm) Boiler Horsepower (Normal Load) 4 Bhp Supply Connection 3/4" F.N.P.T. Return Connection 3/4" M.N.P.T.	

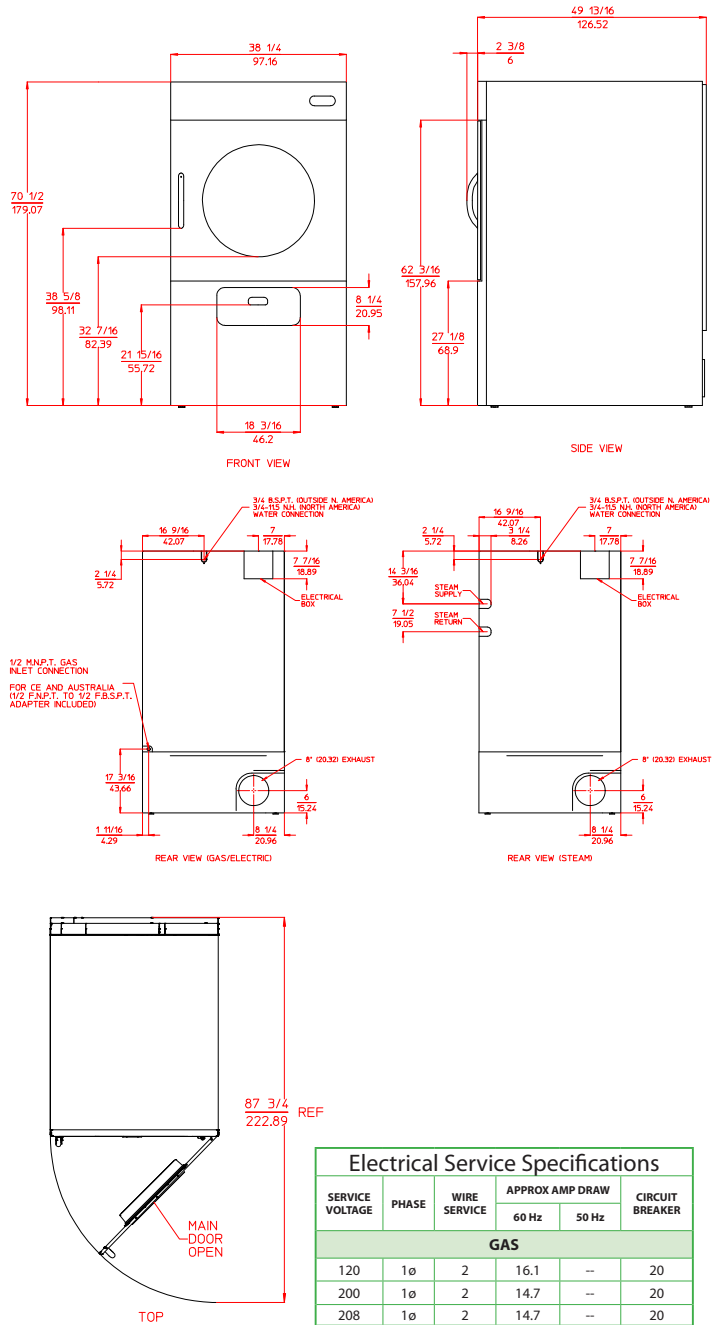

* Specifications in parentheses are metric equivalents.

2/8/16

Electrical Service Specifications

SERVICE VOLTAGE	PHASE	WIRE SERVICE	OVEN kW	APPROX AMP DRAW		CIRCUIT BREAKER	SERVICE VOLTAGE	PHASE	WIRE SERVICE	OVEN kW	APPROX AMP DRAW		CIRCUIT BREAKER
				60 Hz	50 Hz						60 Hz	50 Hz	
ELECTRIC													
200	1ø	2	20.3	114.4	--	150	220	3ø	3	18.5	60.2	57.8	80
208	1ø	2	22.0	118.7	--	150	230	3ø	3	20.3	--	60.0	80
220	1ø	2	18.5	95.7	93.3	120	240	3ø	3	22.0	64.2	--	80
230	1ø	2	20.3	--	97.2	130	380	3ø	4	18.5	39.6	37.2	50
240	1ø	2	22.0	103.0	--	130	400	3ø	4	20.3	--	40.2	50
208	3ø	3	22.0	73.8	--	100	416	3ø	4	22.0	--	39.6	50

Electrical Service Specifications					
SERVICE VOLTAGE	PHASE	WIRE SERVICE	APPROX AMP DRAW		CIRCUIT BREAKER
			60 Hz	50 Hz	
GAS					
120	1ø	2	16.1	--	20
200	1ø	2	14.7	--	20
208	1ø	2	14.7	--	20
220	1ø	2	13.8	--	20
230	1ø	2	13.7	--	20
240	1ø	2	13.4	--	20
220	1ø	2	--	11.3	15
230	1ø	2	--	11.3	15
240	1ø	2	--	11.9	15
STEAM					
120	1ø	2	12.7	--	20
200	1ø	2	12.8	--	20
208	1ø	2	12.8	--	20
220	1ø	2	11.8	9.4	15
230	1ø	2	--	9.4	15
240	1ø	2	11.4	10.0	15

