


WASHING MACHINE MWB 26Z

Dimensions sheme (Not for UL,CSA)



2021

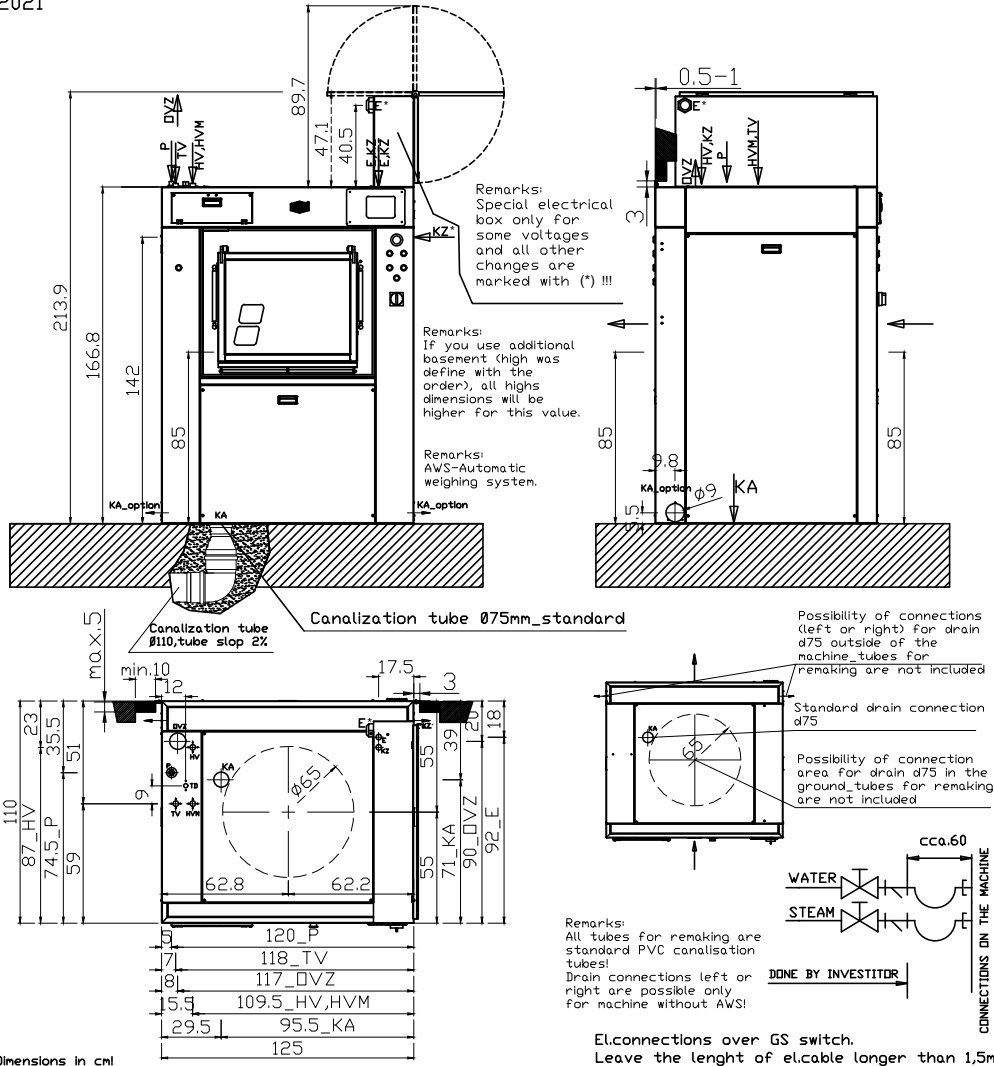

Dimensions in cm!

TEHN. CHARACTERISTICS	Type of the machine	Units	MWB 26Z			
			(steam heating)	(steam heating)	(electric heating)	(combined heating)
CAPACITY 1:10		kg/fill.	26			
DIMENSIONS		mm	1250 x 1100 x 1668			
WEIGHT:net/gross		kg	775/795			
G-faktor			375			
CONNECTIONS: cold water -HV hot water max.75°C -TV cold water-soft -HVM kompresed air-KZ and KZ* steam (direct) -P		DN	20 (3/4) 20 (3/4) 20 (3/4) 10 (3/8)			
air exhaust -DVZ			75			
liquid dosing -TD			15 (1/2)			
CANALISATION -KA		mm	75			
EL.CONNECTION POWER		kW	4,5			28,5
PROTECTION (400V/3NAC/50Hz)		A	20			50
EL.CONNECTION CABLE -E*		mm ² Cu	5x2,5			5x6
PROTECTION (208V/3AC/50/60Hz)		A	25			80
EL.CONNECTION CABLE -E		mm ² Cu	4x4,5			4x16
PROTECTION (220V/3AC/50/60Hz)		A	25			80
EL.CONNECTION CABLE -E		mm ² Cu	4x4			4x16
PROTECTION (240V/3AC/50/60Hz)		A	25			80
EL.CONNECTION CABLE -E		mm ² Cu	4x4,5			4x16
PROTECTION (480V/3AC/50/60Hz)		A	20			40
EL.CONNECTION CABLE -E		mm ² Cu	4x2,5			4x6
PROTECTION 600V/3AC/50/60Hz)		A	16			35
EL.CONNECTION CABLE -E		mm ² Cu	4x2,5			4x6
CONNECT.HEAT.POWER:	steam	kW	50		---	50
	electric	kW	---			24
	water	l/s	2			
PRESSURE ON INLETS: water			2 - 6			
kompresed air			6 - 10			
high(Pv)/low(Pn) press.steam		bar	3-8 (Pv)	0,3-0,5 (Pn)	---	Pv or Pn